



Hiab XS 111 CLX Capacity 72,000 ft-lbs



Product brochure



Column close to centerline

On Hiab cranes with a rack-and-pinion slewing housing, the center of gravity is as close to the centerline as possible. This means that the same outreach is offered on both sides of the truck.

Oil bath

Keeping the slewing mechanism in an oil bath provides smooth and precise slewing. Reduced wear on the mechanism keeps repair and service costs low and also guarantees longer crane life.

Load-holding valve

The load-holding valve is a combined hose-failure and load-holding valve, which is mounted on the cylinder.

Providing solutions for your business

The Hiab XS 111 – a toolbox with reach

The Hiab XS 111 CLX is a very versatile tool with a 72,000 ft-lb capacity. This multi-purpose workhorse is built to withstand tough working conditions, yet it has all the feel and control you need to deliver loads with very high precision. The well proven hexagonal boom profile, high torque slewing system, JIC couplings and large slide pads all work together to provide you with a crane that performs better than you could ever imagine. The Hiab Valve 80 is the main control valve, operated via side controls at the crane base, or as an option from a control platform.

Designed for the tough jobs, every day

Hiab designs cranes for rough and tough operation, and this crane is no exception. The crane is designed to be on the job, day in and day out, where it belongs; however, unscheduled servicing is necessary from time to time. In order to keep servicing time as short as possible, we have equipped the

crane with JIC couplings and easily replaceable large slide pads. Before you know it, the crane is back at the jobsite, doing what it does best: creating solutions and versatility for your business.

CLX control system

The CLX control system gives you an excellent and versatile crane, providing all the functionality you need to perform a wide range of general cargo-handling tasks. CLX cranes are controlled manually via side controls. Optional solutions, such as a control platform, are also available. The CLX crane's hydraulic system features load-holding valves with an integrated hose failure function, as well as port relief valves to prevent overloading the crane. The main control valve is the Hiab Valve 80, which enables the crane to perform more than one crane function at a time, smoothly and efficiently.



Hexagonal boom profile

The hexagonal profile ensures that the boom is always held in perfect balance, thanks to its shape and large support surface. The profile also minimizes boom deflection, thus reducing maintenance costs and increasing efficiency.

Large slide pads

Large slide pads reduce friction and wear, keeping maintenance costs low. Also the Hiab boom system needs no greasing, and thus it stays cleaner than those of our competitors.

Attachable tools

A wide range of attachable tools are available for your Hiab crane. These enable you to carry out many different tasks.




Side controls

The levers are positioned at the crane base. Cross-controls give the same sequence of levers on both sides. As an option, the levers can be positioned at a control platform.



Valve 80

The Hiab Valve 80 is a top-of-the-line open-center valve, based on a well-proven technique which gives superb reliability. The valve handles large oil flows and provides great precision and ease of operation.

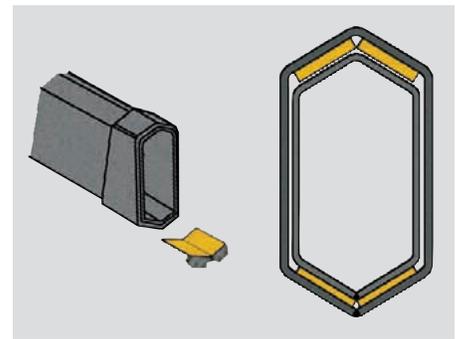

Large slide pads

The hexagonal profile enables the use of larger slide pads. This makes the extensions move more smoothly and reduces mechanical wear on the boom.



Calgary

8019 - 54th Street S.E.
Calgary AB T2C 4R7
1 (888) 843-6111

Edmonton

9410 - 51 Avenue N.W.
Edmonton, AB T6E 5A6
1 (866) 840-9365

info@arwtruck.com www.arwtruck.com