

Hiab XS 244 CLX

Capacity 22 tm





Basic data

Hiab XS 244 CLX Basic data

Technical data

	EP-2 CLX	EP-3 CLX	EP-4 CLX	EP-5 CLX
Max. lifting capacity (kNm)	214	208	203	199
Outreach - hydraulic extensions (m)	8.0	10.3	12.7	15.1
Outreach - manual extensions (m)	12.5	14.9	17.2	17.2
Outreach / Lifting capacity, standard (m / kg)	2.5 / 8400	2.5 / 8200	2.4 / 8200	2.4 / 8200
	4.2 / 5200	4.3 / 4950	4.4 / 4700	4.5 / 4500
	5.9 / 3700	6.0 / 3450	6.1 / 3250	6.2 / 3100
	7.9 / 2760	8.0 / 2540	8.1 / 2380	8.2 / 2220
	-	10.2 / 1980	10.3 / 1820	10.4 / 1680
	-	-	12.6 / 1460	12.7 / 1340
	-	-	-	15.0 / 1120
Slewing angle	410°	410°	410°	410°
Height in folded position (mm)	2335	2335	2335	2335
Width in folded position (mm)	2429	2495	2495	2500
Installation space needed (mm)	1195	1185	1242	1192
Weight - "standard" crane without stabilizers (kg)	2390	2590	2760	2900
Weight - stabilizer equipment (kg)	381 - 474	381 - 474	381 - 474	381 - 474

Hiab XS 244 EP-5 CLX

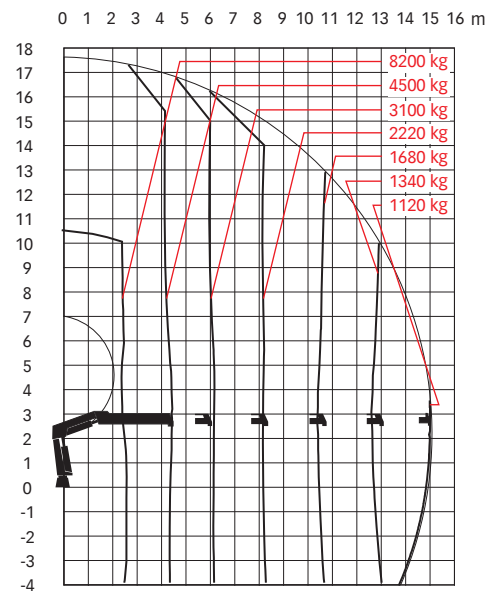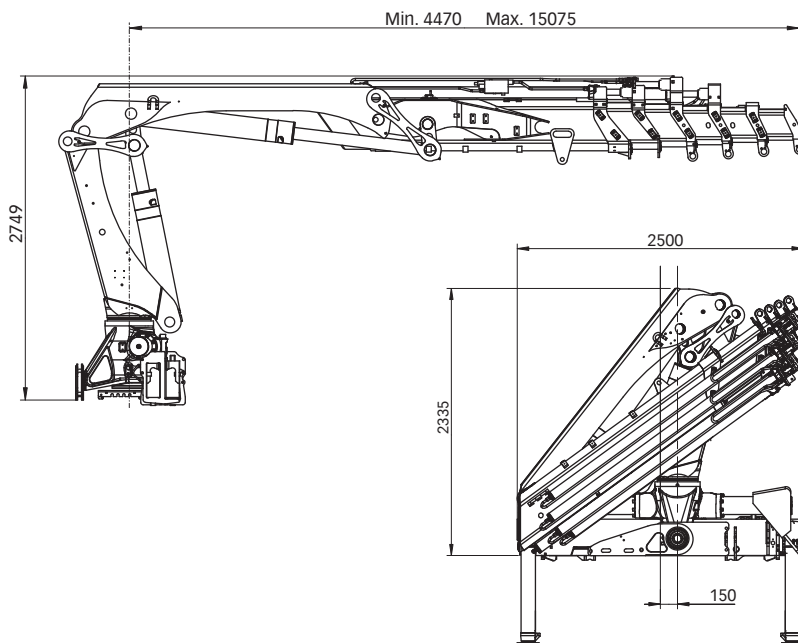

ARW TRUCK EQUIPMENT LTD.

Calgary
8019 - 54th Street S.E.
Calgary AB T2C 4R7
1 (888) 843-6111

Edmonton
9410 - 51 Avenue N.W.
Edmonton, AB T6E 5A6
1 (866) 840-9365